

No. **NIG/18** / SE/AIIMS/RPR/2017-18

Date: 14/12/2017

**NOTICE INVITING SPOT QUOTATION**

Sealed Item Rates quotations for the below mentioned work are hereby invited by The Superintending Engineer on behalf of The Director, AIIMS Raipur from approved and eligible Contractors/Firms/Individuals/Supplier having GSTIN/PAN no./ relevant documents should be submitted to Junior Engineers, Project Cell, Hospital Administrative Block, Gate No-1, AIIMS Raipur up to 3:00 pm on 15<sup>th</sup> December 2017. The right to reject any or all the quotations without assigning any reasons thereof shall rest with undersigned. The quotations will be opened on the same day at 3:30 pm. As per detailed below:-

**SCHEDULE OF QUANTITY**

Name of Work:-- Closing of Windows in Ots at GF & FF, A Block at AIIMS Raipur

Sl.	Description of items	Unit	Qty	Rate	Amount
.....As PER SHEET ATTACHED.....					

**Conditions:**

1. Rate should be quoted inclusive of all the taxes (Nothing to be paid extra on this account). Percentage / Quantum of Tax shall be mentioned.
2. Work shall be completed within 08 (Eight) Days from the date of issue of WO.
3. Aluminium sections to be used in the work should have make of Jindal/Hindalco/Indalco.
4. Work has to be done as per CPWD specification & direction of Engineer In-charge.
5. As the work is to be done in running Hospital, the restrictions if any has to be obeyed by the Contractor.
6. Damage if any done/happened by the contractor then, he has to make it good as original.
7. Payment shall be done for the work done and measured.
8. Security deposit @ 5% shall be deducted & released after Defect Liability Period of 6 months.
9. Labour law to be obeyed by the agency.

Junior Engineer (Civil)  
AIIMS Raipur

Superintending Engineer  
AIIMS Raipur  
14/12/17

**Copy To:**

1. The Director, AIIMS Raipur.
2. The Deputy Director (Admin), AIIMS Raipur.
3. The Financial Advisor, AIIMS Raipur.
4. Sr. Administrative Officer, AIIMS Raipur.
5. Dr. P.K. Neema.
6. M/S B.L. Kashyap
7. M/S Punj Lloyd Limited
8. M/S Puskar Gokulka
9. M/S Manohar lal Gawri
10. Er. Nayan Parakh, JE(C)
11. Er. Parag Yadu, JE(C)

For Information

For Information & Necessary actions

You are instructed to collect as many quotation personally so that competitive rates may be recorded

Superintending Engineer  
AIIMS Raipur  
14/12/17

### SCHEDULE OF QUANTITIES

Name of Work: Closing of Windows in Ots at GF & FF, A-Block at AIIMS Raipur


S no	DSR ref no	Description of item	Qty	Unit	Rate		Amount
					(In Figures)	(In Words)	
<b>Brick work</b>							
1	6.34.2	Brick work with non modular fly ash bricks conforming to IS:12894, class designation 10 average compressive strength in super structure above plinth level up to floor V level in : Cement mortar 1:6 (1 cement : 6 Coarse sand)	6.2	cum			
<b>Finishing</b>							
2	13.4.1	Cement mortar 1:6 (1 cement : 6 Coarse sand) : 1:4 (1 cement: 4 coarse sand)	27.0	sqm			
3	13.60.1	Wall painting with acrylic emulsion paint of approved brand and manufacture to give an even shade : Two or more coats on new work	27.0	sqm			
4	13.80	Providing and applying white cement based putty of average thickness 1 mm, of approved brand and manufacturer, over the plastered wall surface to prepare the surface even and smooth complete.	27.0	sqm			
5	21.1.1.2	Providing and fixing aluminium work for doors, windows, ventilators and partitions with extruded built up standard tubular sections/ appropriate Z sections and other sections of approved make conforming to IS: 733 and IS: 1285, fixing with dash fasteners of required dia and size, including necessary filling up the gaps at junctions, i.e. at top, bottom and sides with required EPDM rubber/ neoprene gasket etc. Aluminium sections shall be smooth, rust free, straight, mitred and jointed mechanically wherever required including cleat angle, Aluminium snap beading for glazing / paneling, C.P. brass / stainless steel screws, all complete as per architectural drawings and the directions of Engineer-in-charge. (Glazing, paneling and dash fasteners to be paid for separately) : For fixed portion : Powder coated aluminium (minimum thickness of powder coating 50 micron) :	130.0	kgs			

6	21.2.2	Providing and fixing 12 mm thick pre-laminated particle board flat pressed three layer or graded wood particle board conforming to IS: 12823 Grade I Type II, in panelling fixed in aluminum doors, windows shutters and partition frames with C.P. brass / stainless steel screws etc. complete as per architectural drawings and directions of Engineer-in-charge : Pre-laminated particle board with decorative lamination on both sides :	27.0	sqm			
<b>Total</b>							

Total in words.....

Total in Figure.....

(Signature of Contractor)

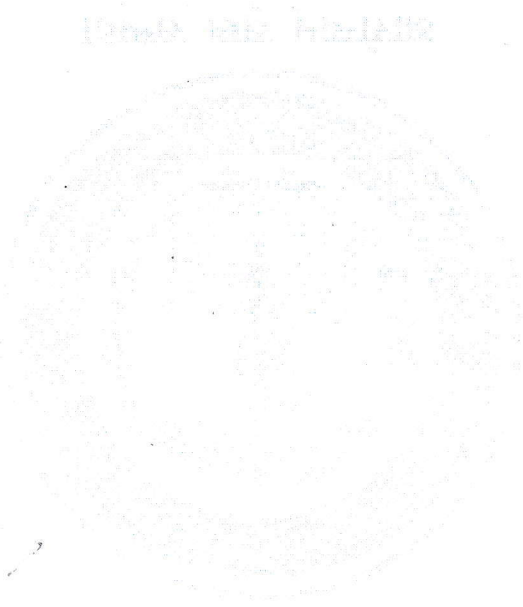

*[Handwritten Signature]*  
 Superintending Engineer

Project Cell, AIIMS Raipur

*[Handwritten Signature]*  
 14/11/18