



अखिल भारतीय आयुर्विज्ञानसंस्थान, रायपुर (छत्तीसगढ़)

All India Institute of Medical Sciences, Raipur (Chhattisgarh)

Tatibandh, GE Road,

Raipur-492 099 (CG)

www.aiimsraipur.edu.in

No.NIQ-10 / SE/AIIMS/2018-19

Date: 02/06/2018

NOTICE INVITING QUOTATION

Sealed Item Rates quotations for the below mentioned work are hereby invited by The Superintending Engineer on behalf of The Director, AIIMS Raipur from approved and eligible Contractors/Firms/Individuals having GST/TIN/PAN no./relevant documents along with Earnest Money in the form of Demand Draft or Pay Order or Banker's Cheque or Deposit at Call Receipt or Fixed Deposit Receipt of a Scheduled Bank (drawn/ Pledged in favour of AIIMS, Raipur) and should be submitted to the office of Project Cell, Hospital Administrative Block, Gate No-1, AIIMS Raipur up to 03:00 PM on 11.06.2018. The NIQ no, Name of Work, Name of Agency and the Designation and Address of the NIQ Authority must be mentioned over the sealed envelope. The schedule of quantity must be filled with blue ball point pen only and correction may be avoided. The bidder must self certify all the documents in the envelope. The right to reject any or all the quotations without assigning any reasons thereof shall rest with undersigned. The quotations will be opened on the same day at 3:30 pm. As per detailed below:-

S No	NAME OF WORK	E.M.D in Rupees	TIME
1	Aluminum Partition at Community Centre at Ram Nagar, Kota, Raipur, for utilization as UHTC by Dept. of Community and Family Medicine, AIIMS, Raipur.	Rs. 24,000/-	18 Days

SCHEDULE OF QUANTITY

S.No	DSR ref. No.	Description of items	Qty	Unit	Rate	Amount
.....As PER SHEET ATTACHED.....						

Conditions:

1. Rate should be quoted inclusive of all the taxes (Nothing to be paid extra on this account). Percentage / Quantum of Tax shall be mentioned.
2. All the relevant documents to be submitted must be signed and sealed by the Proprietor/Contractor/ Authorised Signatory of the Firm
3. All pages of Schedule of Quantity must be filled with Blue Ball Point Pen Only and shall be duly sealed and signed by the Proprietor/Contractor/ Authorised Signatory of the Firm.
4. Interested Bidders are advised to contact Project Cell, AIIMS Raipur for a visit to the site prior to quoting rates so as to ascertain themselves regarding the nature of work to be done.
5. F.O.R. Community Centre, Sant Ramdas Ward, Raipur, Chhattisgarh..
6. The right to reject any or all the quotations without assigning any reasons and accept full or part of Quotation thereof shall rest with the Superintending Engineer.
7. Work should be completed within 18 Days from the date of issue of WO.
8. Work shall be started within 3 days from the date of issue of work order and if the agency fails to do so entire EMD will be forfeited by AIIMS Raipur.


9. Damage if any done/happened by the contractor then, he has to make it good as original.
10. Security deposit @ 5% shall be deducted from RA Bill & shall be released after Defect Liability Period of 6 Months.
11. Liquidated Damages (LD) will be imposed at the rate of 0.1% per day and maximum upto 10%, if the agency fails to complete the work within the stipulated time.
12. All the arrangements .i.e. Water Supply, Electricity Supply, All Material, Machinery, Labour and auxillary supplies required by the manpower for working is to be arranged by the agency and nothing extra to be paid in this regard.
13. Aluminum Section is to be used in this work should have make of Jindal/Hindalco and should have minimum thickness of 3mm.



JE (Civil)
AIIMS Raipur



Superintending Engineer
AIIMS Raipur

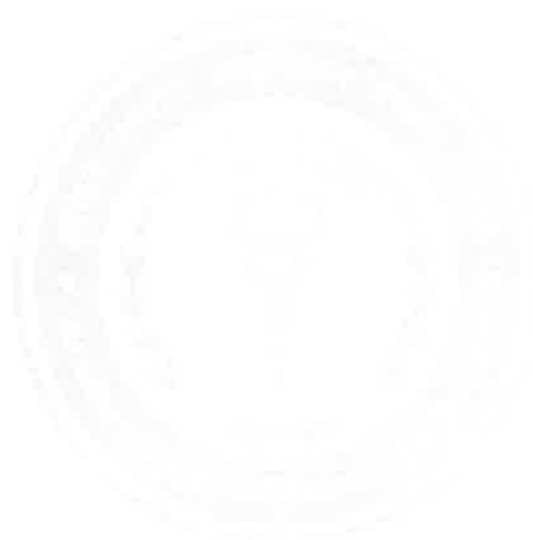

Schedule OF Quantity

Name of Work: Aluminium Partition at Community Centre at Ram Nagar, Kota Raipur for utilisation as UHTC by Dept. of Community and Family Medicine, AIIMS Raipur.

S no	DSR ref no	Description of item	Qty	Unit	Rate		Amount
					IN Figures	In Words	
1	21.1.1.2	Providing and fixing aluminium work for doors, windows, ventilators and partitions with extruded built up standard tubular sections/ appropriate Z sections and other sections of approved make conforming to IS: 733 and IS: 1285, fixing with dash fasteners of required dia and size, including necessary filling up the gaps at junctions, i.e. at top, bottom and sides with required EPDM rubber/ neoprene gasket etc. Aluminium sections shall be smooth, rust free, straight, mitred and jointed mechanically wherever required including cleat angle, Aluminium snap beading for glazing / paneling, C.P. brass / stainless steel screws, all complete as per architectural drawings and the directions of Engineer-in-charge. (Glazing, paneling and dash fasteners to be paid for separately) : For fixed portion : Powder coated aluminium (minimum thickness of powder coating 50 micron) :	1976	Kgs			



2	21.1.2.2	<p>Providing and fixing aluminium work for doors, windows, ventilators and partitions with extruded built up standard tubular sections/ appropriate Z sections and other sections of approved make conforming to IS: 733 and IS: 1285, fixing with dash fasteners of required dia and size, including necessary filling up the gaps at junctions, i.e. at top, bottom and sides with required EPDM rubber/ neoprene gasket etc. Aluminium sections shall be smooth, rust free, straight, mitred and jointed mechanically wherever required including cleat angle, Aluminium snap beading for glazing / paneling, C.P. brass / stainless steel screws, all complete as per architectural drawings and the directions of Engineer-in-charge. (Glazing, paneling and dash fasteners to be paid for separately) : For shutters of doors, windows & ventilators including providing and fixing hinges/ pivots and making provision for fixing of fittings wherever required including the cost of EPDM rubber / neoprene gasket required (Fittings shall be paid for separately) : Powder coated aluminium (minimum thickness of powder coating 50 micron)</p>	320	Kgs			
3	21.2.2	<p>Providing and fixing 12 mm thick pre-laminated particle board flat pressed three layer or graded wood particle board conforming to IS: 12823 Grade I Type II, in panelling fixed in aluminum doors, windows shutters and partition frames with C.P. brass / stainless steel screws etc. complete as per architectural drawings and directions of Engineer-in-charge : Pre-laminated particle board with decorative lamination on both sides :</p>	200	Sqm			



4	21.17	Providing and fixing anodised aluminium grill (anodised transparent or dyed to required shade according to IS: 1868 with minimum anodic coating of grade AC 15) of approved design/pattern, with approved standard section and fixed to the existing window frame with C.P. brass/ stainless steel screws @ 200 mm centre to centre, including cutting the grill to proper opening size for fixing and operation of handles and fixing approved anodised aluminium standard section around the opening, all complete as per requirement and direction of Engineer-in-charge. (Only weight of grill to be measured for payment).	92	kg			
5	9.97.2	Providing and fixing aluminium tower bolts, ISI marked, anodised (anodic coating not less than grade AC 10 as per IS : 1868) transparent or dyed to required colour or shade, with necessary screws etc. complete : 250x10 mm	13	each			
6	9.95.5	Providing and fixing ISI marked aluminium butt hinges anodised (anodic coating not less than grade AC 10 as per IS: 1868) transparent or dyed to required colour or shade with necessary screws etc. complete: 100x63x3.2 mm :	52	each			
7	9.101.2	Providing and fixing aluminium hanging floor door stopper, ISI marked, anodised (anodic coating not less than grade AC 10 as per IS : 1868) transparent or dyed to required colour and shade, with necessary screws etc. complete : Twin rubber stopper	13	each			
8	9.113	Providing and fixing bright finished 100 mm mortice lock with 6 levers without pair of handles of approved quality for aluminium door, with necessary screws etc complete as per direction of Engineer- in-charge	13	each			



9	21.3	Providing and fixing glazing in aluminium door, window, ventilator shutters and partitions etc. with EPDM rubber / neoprene gasket etc. complete as per the architectural drawings and the directions of Engineer-in-charge . (Cost of aluminium snap beading shall be paid in basic item):					
	21.3.2	With float glass panes of 5.50 mm thickness	27	sqm			
10	LMR	Providing and fixing bright finished 250 mm pair of stainless steel handles of approved quality for aluminium door, with necessary screws etc complete as per direction of Engineer- in-charge	13	each			
11	9.84	Providing and fixing aluminium extruded section body tubular type universal hydraulic door closer (having brand logo with IS : 3564, embossed on the body, door weight upto 36 kg to 80 kg and door width from 701 mm to 1000 mm), with double speed adjustment with necessary accessories and screws etc. complete.	4.0	each			
Other Items							
11	11.36	Providing and fixing 1st quality ceramic glazed wall tiles conforming to IS: 15622 (thickness to be specified by the manufacturer), of approved make, in all colours, shades except burgundy, bottle green, black of any size as approved by Engineer-in-Charge, in skirting, risers of steps and dados, over 12 mm thick bed of cement mortar 1:3 (1 cement : 3 coarse sand) and jointing with grey cement slurry @ 3.3kg per sqm, including pointing in white cement mixed with pigment of matching shade complete.	25	sqm			



12	18.8	Providing and fixing Chlorinated Polyvinyl Chloride (CPVC) pipes, having thermal stability for hot & cold water supply, including all CPVC plain & brass threaded fittings, i/c fixing the pipe with clamps at 1.00 m spacing. This includes jointing of pipes & fittings with one step CPVC solvent cement and the cost of cutting chases and making good the same including testing of joints complete as per direction of Engineer in Charge. Concealed work, including cutting chases and making good the walls etc.						
	18.8.4	32 mm nominal outer dia Pipes	10	metre				
13	11.46	Providing and laying Vitrified tiles in different sizes (thickness to be specified by manufacturer), with water absorption less than 0.08 % and conforming to I.S. 15622, of approved make, in all colours & shade, in skirting, riser of steps, over 12 mm thick bed of cement mortar 1:3 (1 cement: 3 coarse sand), jointing with grey cement slurry @ 3.3kg/sqm including grouting the joint with white cement & matching pigments etc. complete.						
	11.46.2	Size of Tile 600x600 mm	6	sqm				
14	18.48A	Providing and placing on terrace (at all floor levels) polyethylene water storage tank, IS : 12701 marked, with cover and suitable locking arrangement and making necessary holes for inlet, outlet and overflow pipes but without fittings and the base support for tank. Circular Tank	1000	per litre				
15	13.71	Lettering with black Japan paint of approved brand and manufacture	2100	per letter per cm height				
Total in Figures								

Total in Words.....

Contractor
(Seal & Sign)




Superintending Engineer
AIIMS Raipur