



अखिल भारतीय आयुर्विज्ञान संस्थान, रायपुर (छत्तीसगढ़)
All India Institute of Medical Sciences, Raipur (Chhattisgarh)
Tatibandh, GE Road,
Raipur-492 099 (CG)
Phone No. 0771-2572930, e-mail: ee.civil@aiimsraipur.edu.in

NIQ No: 08./EE/AIIMS/RPR/2020-21

Date: 05/05/2020

NOTICE INVITING SPOT QUOTATION

Spot sealed percentage rate quotation is hereby invited by The Executive Engineer (Civil) on behalf of the Director, AIIMS Raipur from **approved and eligible Contractors/Firms of CPWD, MES, BSNL, Chhattisgarh State PWD having GST no. and relevant documents** and should be submitted to the office of Project Cell, Hospital Administrative Block, Gate No-1, AIIMS Raipur up to 03:00 PM on **06-05-2020**. The NIQ no, Name of Work, Name of Agency with Address must be mentioned over the sealed envelope. The percentage below or above must be filled. The bidder must self-certify all the documents in the envelope. The quotations will be opened on the same day at 3:30 pm. As per detailed below:-

Name of Work: Construction of platform in PCR lab in Medical College Building at AIIMS Raipur.

Schedule of Quantity

Sl No	Description of items	Unit	Quantity	Rate	Amount
1AS PER ATTACHED SHEET.....				

Conditions

1. Percentage rates should be quoted inclusive of all taxes (Nothing to be paid extra on this account).
2. Work has to be done as per CPWD specification and direction of Engineer In-charge.
3. Damage if any done/happened by the Contractor has to make it good as original.
4. Work should be completed within 7 Days from the date of issue of work order.
5. The work may be executed day and night with the permission of competent authority to achieve the target date of completion and no any relaxation will be given anyhow.
6. Labour Law to be obeyed by the Agency.
7. Approved material will only be accepted.
8. The site is available for immediate execution of work.
9. Security deposit @ 2.50% will be deducted from 1st and final bill and will be released after successful completion of six months.
10. The bidder shall be responsible for arranging and maintaining at his own cost all materials, tools & plants, water, electricity access, facilities for workers and all other services required for executing the work.
11. If the work will not be completed in time a deduction will be made @ 2.00% of quoted value.

Executive Engineer (C)
AIIMS Raipur (Chhattisgarh)



आरोग्यम् सुखं चानन्दोऽस्मिन् निवसति
अस्मिन् सुखे चानन्दोऽस्मिन् निवसति
अस्मिन् सुखे चानन्दोऽस्मिन् निवसति

आरोग्यम् सुखं चानन्दोऽस्मिन् निवसति

आरोग्यम् सुखं चानन्दोऽस्मिन् निवसति

आरोग्यम् सुखं चानन्दोऽस्मिन् निवसति
अस्मिन् सुखे चानन्दोऽस्मिन् निवसति
अस्मिन् सुखे चानन्दोऽस्मिन् निवसति

आरोग्यम् सुखं चानन्दोऽस्मिन् निवसति



आरोग्यम् सुखं चानन्दोऽस्मिन् निवसति

आरोग्यम् सुखं चानन्दोऽस्मिन् निवसति

आरोग्यम् सुखं चानन्दोऽस्मिन् निवसति

आरोग्यम् सुखं चानन्दोऽस्मिन् निवसति
अस्मिन् सुखे चानन्दोऽस्मिन् निवसति
अस्मिन् सुखे चानन्दोऽस्मिन् निवसति


आरोग्यम् सुखं चानन्दोऽस्मिन् निवसति

Name of Work- Construction of platform in PCR lab in Medical College Building at AIIMS Raipur.

SCHEDULE OF QUANTITY

Sr.No	Item	Qty	Unit	Rate	Amount
1	Half brick masonry with non modular fly ash bricks of class designation 7.5 in super structure above plinth and up to floor V level in Cement mortar 1 : 4 (1 cement : 4 coarse sand)	6.83	sqm	917.00	6263.11
2	Providing and fixing of stone slab 32 mm thick and up to 80 cm wide over the masonry brick wall. (i) Rajim stone (one Side Polished)	6.46	sqm	583.00	3766.18
3	Providing and fixing 18 mm thick gang saw cut, mirror polished, premoulded and prepolished, machine cut for kitchen platforms, vanity counters, window sills, facias and similar locations of required size, approved shade, colour and texture laid over 20 mm thick base cement mortar 1:4 (1 cement : 4 coarse sand), joints treated with white cement, mixed with matching pigment, epoxy touch ups, including rubbing, curing, moulding and polishing to edges to give high gloss finish etc. complete at all levels. (i) Granite of any colour and shade (Area of slab over 0.50 sqm Area of slab over 0.50 sqm)	12.25	sqm	4007.65	49093.71
4	Extra for fixing marble /granite stone, over and above corresponding basic item, in facia and drops of width up to 150 mm with epoxy resin based adhesive, including cleaning etc. complete.	23.03	metre	434.25	10000.78
5	12 mm cement plaster of mix : 1:4 (1 cement: 4 fine sand)	12.04	sqm	266.85	3212.87
6	Providing and applying white cement based putty of average thickness 1 mm, of approved brand and manufacturer, over the plastered wall surface to prepare the surface even and smooth complete.	12.04	sqm	115.15	1386.41
7	Wall painting with acrylic emulsion paint, having VOC (Volatile Organic Compound) content less than 50 grams/ litre, of approved brand and manufacture, including applying additional coats wherever required, to achieve even shade and colour. (i) Two coats	12.04	sqm	106.80	1285.87
Total in Rs					75008.93
Say					75009.00

	percentage rate quoted by the agency	in words	
		in fig	
Name of agency			
Address details			
Contact no.			
Valid Email id			

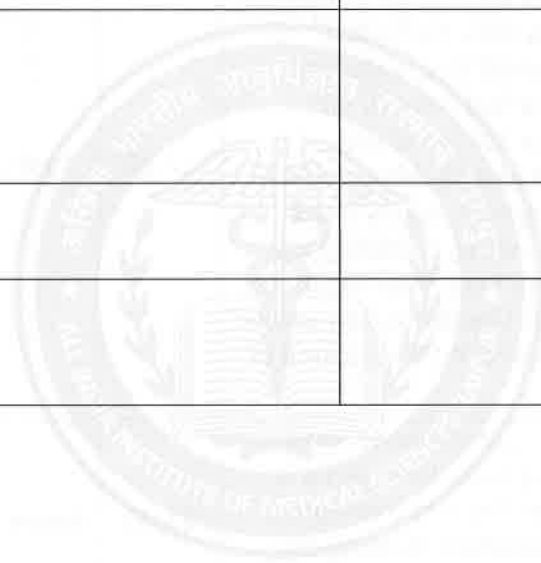

आरोग्यम् शुच्यं सन्ध्या