



अखिल भारतीय आयुर्विज्ञान संस्थान, रायपुर (छत्तीसगढ़)
All India Institute of Medical Sciences, Raipur (Chhattisgarh)
 Tatibandh, GE Road,
 Raipur-492 099 (CG)
 Phone No. 0771-2572930, e-mail: se@aiimsraipur.edu.in

NIQ No: 27/EE/AIIMS/RPR/2020-21

Date:10-11-2020

NOTICE INVITING SPOT QUOTATION

Spot sealed quotation is hereby invited by The Executive Engineer (Civil) on behalf of The Director; AIIMS Raipur from the **registered civil contractors of appropriate list of CPWD, M.E.S., BSNL, Railway, P.W.D. (B&R)** having GSTIN No. should be submitted to office of Project Cell, Hospital Administrative Block, Gate No-1, AIIMS Raipur up to **12:00 Noon** on **13th November 2020**. The right to reject any or all the quotations without assigning any reasons thereof shall rest with undersigned. The quotations will be opened on the same day at **12:30 PM**. As per detailed below:-

SCHEDULE OF QUANTITY

Name of Work: Construction of toilet in tuberculosis laboratory in Animal house Building at AIIMS Raipur.


Sl No	Description of items	Unit	Quantity	Rate	Amount
1AS PER ATTACHED SHEET.....				

Conditions:

1. Percentage rates should be quoted inclusive of all taxes (Nothing to be paid extra on this account).
2. Work has to be done as per CPWD specification and direction of Engineer- In-charge & the first and final bill payment will be done after completion of work as per specification.
3. Damage if any done/happened by the Contractor has to make it good as original.
4. Time allowed for the completion of the work is **15 days**. It will be reckoned from the day award of the work. If the agency not completed work within stipulated date then LD@0.5% per week of delayed contract value subject to maximum of 10% of delayed contract value will be deducted.
5. **Certificate of Registration for GST, Contractors' registration should be attached with Quotation and duly seal & sign on each documents.**
6. The work may be executed day and night with the permission of competent authority to achieve the target date of completion and no any relaxation will be given anyhow.
7. The Contractor shall remove from site all rubbish and debris generated by the Works and keep Works clean and tidy.
8. Labour Law to be obeyed by the Agency.
9. The site is available for immediate execution of work.

गीतिजा
10/11/2020

Executive Engineer (C)
 AIIMS Raipur (Chhattisgarh)

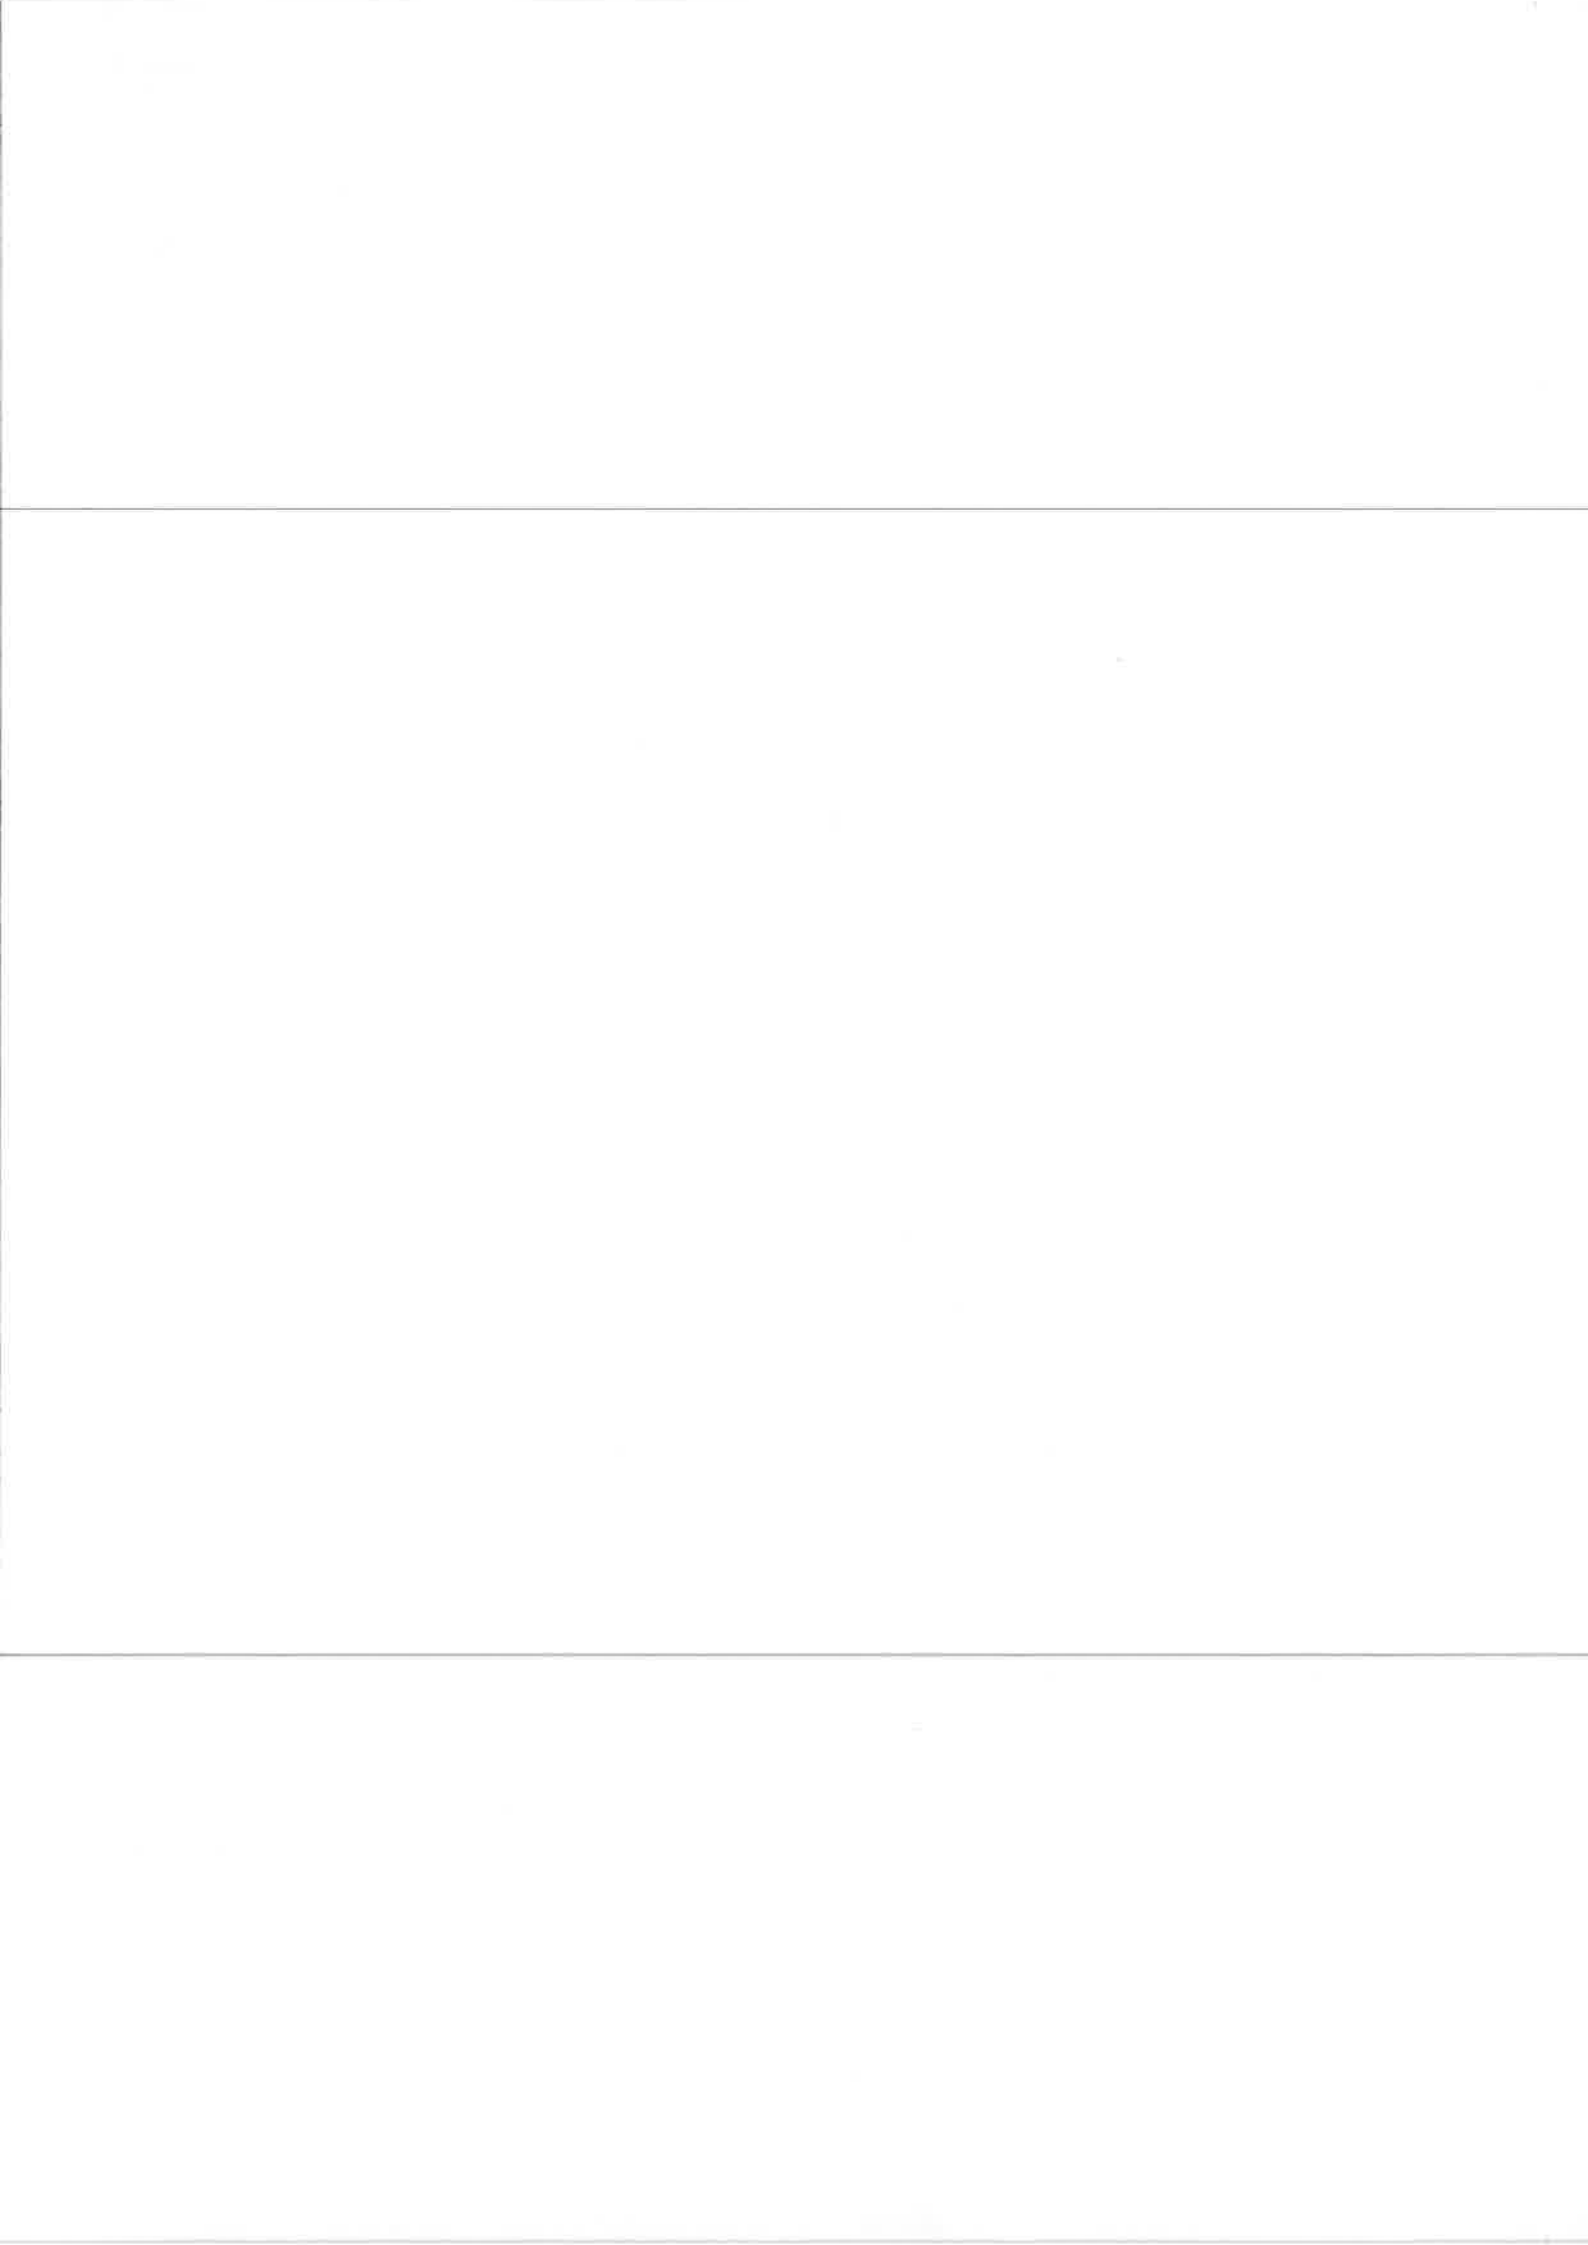

Schedule of Quantity

Name of Work: Construction of toilet in tuberculosis laboratory in Animal house Building at AIIMS Raipur.

Item no	Description of item	Qty	Unit	Rate	Amount
1	SUB HEAD I - Masonry Work				
1.1	Half brick masonry with non modular fly ash bricks of class designation 7.5 in super structure above plinth and upto floor V level.				
1.1.1	Cement mortar 1 : 4 (1 cement : 4 coarse sand)	6.80	sqm	917.00	6235.60
2	SUB HEAD II - Cladding Work				
2.1	Providing and fixing 1st quality ceramic glazed wall tiles conforming to IS: 15622 (thickness to be specified by the manufacturer), of approved make, in all colours, shades except burgundy, bottle green, black of any size as approved by Engineer-in-Charge, in skirting, risers of steps and dados, over 12 mm thick bed of cement mortar 1:3 (1 cement : 3 coarse sand) and jointing with grey cement slurry @ 3.3kg per sqm, including pointing in white cement mixed with pigment of matching shade complete.	12.40	sqm	1030.30	12775.72

3	SUB HEAD III - Wood and PVC Work								
3.1	Providing and fixing factory made uPVC door frame made of uPVC extruded sections having an overall dimension as below (tolerance ± 1 mm), with wall thickness 2.0 mm (± 0.2 mm), corners of the door frame to be Jointed with galvanized brackets and stainless steel screws, joints mitred and Plastic welded. The hinge side vertical of the frames reinforced by galvanized M.S. tube of size 19 X 19 mm and 1mm (± 0.1 mm) wall thickness and 3 nos. stainless steel hinges fixed to the frame complete as per manufacturer's specification and direction of Engineerin-charge								
3.1.1	Extruded section profile size 48x40 mm			5.00	metre			221.65	1108.25
3.2	Providing and fixing to existing door frames.								

	<p>Providing and laying Ceramic matt finish floor tiles of size 300x300 mm (thickness to be specified by the manufacturer) of 1st quality conforming to IS : 15622 of approved make in colours such as White, Ivory, Grey, Fume Red Brown, laid on 20 mm thick cement mortar 1:4 (1 Cement : 4 Coarse sand), Jointing with grey cement slurry @ 3.3 kg/sqm including pointing the joints with white cement and matching pigment etc., complete.</p>	2.52	sqm	926.90	2335.79
5	SUB HEAD V -Roofing				
5.1	<p>Providing and fixing on wall face unplasticised Rigid PVC rain water pipes conforming to IS : 13592 Type Ø, including jointing with seal ring conforming to IS : 5382, leaving 10 mm gap for thermal expansion, (i) Single socketed pipes.</p>				
5.1.1	75 mm diameter	20.00	metre	201.10	4022.00
5.1.2	110 mm diameter	10.00	metre	305.05	3050.50

FS

3.2.1	<p>30 mm thick factory made Polyvinyl Chloride (PVC) door shutter made of styles and rails of a uPVC hollow section of size 60x30 mm and wall thickness 2 mm (± 0.2 mm), with inbuilt decorative moulding edging on one side. The styles and rails mitred and joint at the corners by means of M.S. galvanised/ plastic brackets of size 75x220 mm having wall thickness 1.0 mm and stainless steel screws. The styles of the shutter reinforced by inserting galvanised M.S. tube of size 25x20 mm and 1 mm (± 0.1 mm) wall thickness. The lock rail made up of 'H' section, a uPVC hollow section of size 100x30 mm and 2 mm (± 0.2 mm) wall thickness fixed to the shutter styles by means of plastic/ galvanised M.S. 'U' cleats. The shutter frame filled with a uPVC multi-chambered single panel of size not less than 620 mm, having over all thickness of 20 mm and 1 mm (± 0.1 mm) wall thickness . The panels filled vertically and tie bar at two places by inserting horizontally 6 mm galvanised M.S. rod and fastened with nuts and washers, complete as per manufacturer's specification and direction of Engineer-in-charge.</p>	1.68	sqm	1978.65	3324.13
4	SUB HEAD IV -Flooring				

6.3	Wall painting with premium acrylic emulsion paint of interior grade, having VOC (Volatile Organic Compound) content less than 50 grams/ litre of approved brand and manufacture, including applying additional coats wherever required to achieve even shade and colour.					
6.3.1	Two coats	15.00	sqm	113.90	1708.50	
7	SUB HEAD VII - Dismantling and Demolishing					
7.1	Demolishing cement concrete manually/ by mechanical means including disposal of material within 50 metres lead as per direction of Engineer - in - charge.					
7.1.1	Nominal concrete 1:3:6 or richer mix (i/c equivalent design mix)	0.13	cum	1737.45	225.87	
8	SUB HEAD VIII - Sanitary Installations					
8.1	Providing and fixing white vitreous china pedestal type water closet (European type W.C. pan) with seat and lid, 10 litre low level white P.V.C. flushing cistern, including flush pipe, with manually controlled device (handle lever), conforming to IS : 7231, with all fittings and fixtures complete, including cutting and making good the walls and floors wherever required :					

5.2	Providing and fixing on wall face unplasticised - PVC moulded fittings/ accessories for unplasticised Rigid PVC SWR pipes conforming to IS : 13592 Type A/B, including jointing with seal ring conforming to IS : 5382, leaving 10 mm gap for thermal expansion.					
5.2.1	Coupler					
5.2.1.1	75 mm	4.00	each	77.85	311.40	
5.2.1.2	110 mm	6.00	each	117.80	706.80	
5.2.2	Single tee with door					
5.2.2.1	75x75x75 mm	2.00	each	139.85	279.70	
5.2.2.2	110x110x110 mm	1.00	each	203.30	203.30	
5.2.3	Bend 87.5°					
5.2.3.1	75 mm bend	2.00	each	89.90	179.80	
5.2.3.2	110 mm bend	2.00	each	129.85	259.70	
5.2.4	Shoe (Plain)					
5.2.4.1	110 mm Shoe	1.00	each	113.80	113.80	
6	SUB HEAD VI - Finishing					
6.1	12 mm cement plaster of mix :					
6.1.1	1:4 (1 cement: 4 fine sand)	17.00	sqm	266.85	4536.45	
6.2	Providing and applying white cement based putty of average thickness 1 mm, of approved brand and manufacturer, over the plastered wall surface to prepare the surface even and smooth complete.	15.00	sqm	115.15	1727.25	

(55)

8.1.1	W.C. pan with ISI marked white solid plastic seat and lid	1.00	each	5260.95	5260.95
8.2	Providing and fixing wash basin with C.I. brackets, 15 mm C.P. brass pillar taps, 32 mm C.P. brass waste of standard pattern, including painting of fittings and brackets, cutting and making good the walls wherever require:				
8.2.1	White Vitreous China Wash basin size 630x450 mm with a single 15 mm C.P. brass pillar tap	1.00	each	2751.30	2751.30
8.3	A Providing and fixing 8 mm dia C.P. / S.S. Jet with flexible tube upto 1 metre long with S.S. triangular plate to European type W.C. of quality and make as approved by Engineer - in - charge.	1.00	each	297.55	297.55
8.4	Providing and fixing P.V.C. waste pipe for sink or wash basin including P.V.C. waste fittings complete.				
8.4.1	Flexible pipe				
8.4.2	32 mm dia	1.00	each	101.10	101.10
9	SUB HEAD IX - Water Supply				
9.1	Providing and fixing G.I. pipes complete with G.I. fittings and clamps, i/c cutting and making good the walls etc.				

9.1.1	25 mm dia nominal bore	15.00	metre	438.00	6570.00
9.1.2	32 mm dia nominal bore	10.00	metre	529.70	5297.00
9.2	Providing and fixing C.P. brass bib cock of approved quality conforming to IS:8931 :				
9.2.1	15 mm nominal bore	2.00	each	418.95	837.90
9.3	Providing and fixing C.P. brass angle valve for basin mixer and geyser points of approved quality conforming to IS:8931				
9.3.1	15mm nominal bore	2.00	each	532.00	1064.00
9.4	Providing and fixing C.P. Brass extension nipple (size 15mmx50mm) of approved make and quality as per direction of Engineer-in-charge.	1.00	each	61.25	61.25
9.5	Providing and fixing PTMT extension nipple for water tank pipe, fittings of approved quality and colour.				
9.5.1	25mm nominal bore, weighing not less than 62 gms	1.00	each	113.40	113.40
9.6	Cutting holes up to 30x30 cm in walls including making good the same:				
9.6.1	With fly ash (non modular) bricks	1.00	each	327.25	327.25
		Total			65786.26
			SAY		65786.00

52

(Rupees Sixty Five Thousand Seven Hundred Eighty Six Only)

In Figure			
Percentage Rate Quoted by the Agency			
In Words			
Name of Agency:			
Address Details:			
Contact no:			
Valid email id:			

51

